




Three Square Market 3329 Casey St.
River Falls, WI 54022 715.386.2233

TableTOP FIXTURE (MINI)

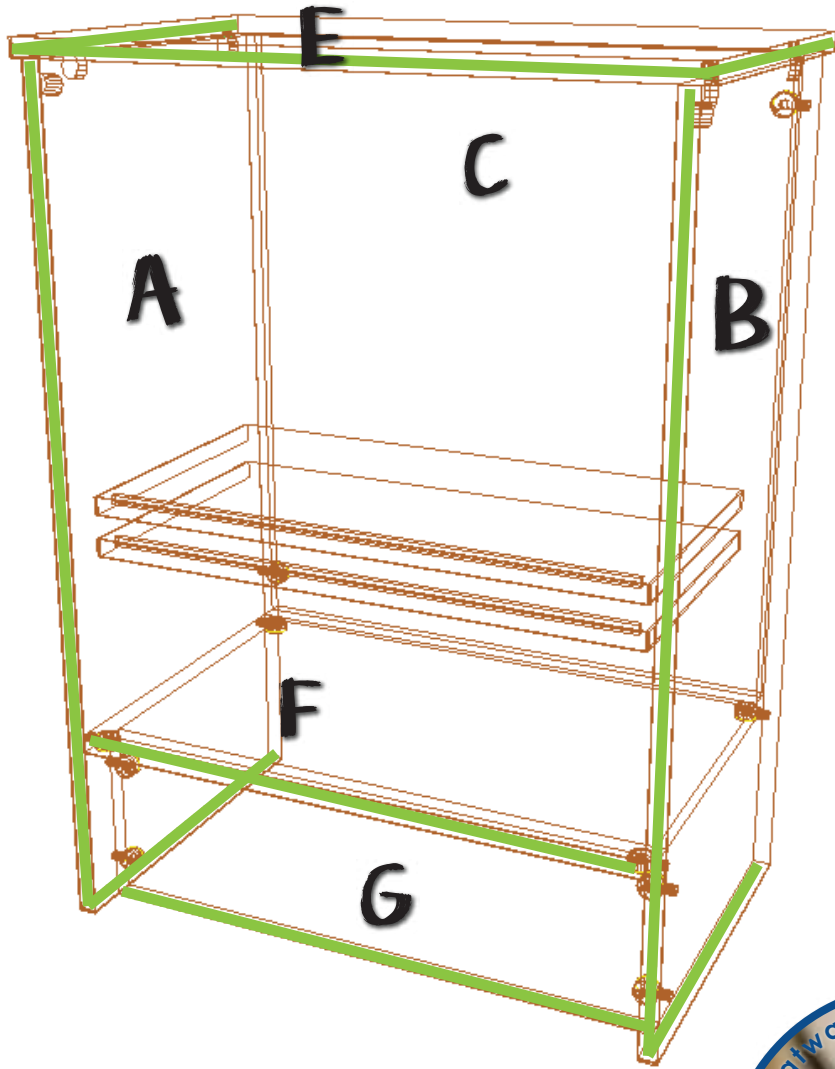

- A - Left side
- B - Right side
- C - Back
- D - Ad Panel
- E - TOP
- F - Deck
- G - Toe Kick



* Edge Banded

32FIXTURES.COM



Three Square Market 3329 Casey St.
River Falls, WI 54022 715.386.2233

TABLETOP FIXTURE (MINI)

1. Lay out all fixture pieces onto a **COMPLETELY FLAT** surface. ***Doing this on an uneven surface may produce breaks in the melamine.** Pound in all clips using the mallet and clip holder provided. ***Hold the clip holder straight up and down.** Make sure all clips are open. Place glue into each shelf cut, insert plexi glass, and leave to dry.
2. Lay B (Right Side) on the floor, holes facing up.
3. Insert C (Back) into B (Right Side). Clips should be facing the back of the fixture. Close the connected clips.
4. Insert F (Deck), **edge banded side facing the front of the fixture**, into B (Right Side). Clips should be facing the bottom of the fixture. Leave the clips open, for now.
5. Insert G (Toe Kick), **edge banded side facing down**, into B (Right Side). Clips should be facing the back of the fixture. Close the connected clips. Close F's connected clips, now.
6. Insert A (Left Side) into F (Deck) and G (Toe Kick). Close the connected clips.
7. Stand the fixture up.
8. Insert E (Top) into A (Left Side) and B (Right Side). Close the connected clips.
9. Double check that ALL clips are closed.
10. Lay the fixture onto its back.
11. Set the slatwall into place. ***Putting a plastic insert into the very bottom, between the slatwall and F (Deck), is helpful for lining it up correctly.**
12. Screw the slatwall into place, lining screws into slat grooves. ***We recommend using 1" sheetrock screws.**
13. Insert all plastic slatwall inserts. ***The lip of the insert should face the top of the fixture (see image on other side).** Apply feet to the fixture. Mount LED lighting if provided.
14. **Stand the fixture up, place shelves, & enjoy**

**SEE THE ASSEMBLY VIDEOS
ON 32FIXTURES.COM!**

32FIXTURES.COM